



WE NOT ONLY RECOMMEND THAT CHILDREN ARE SUPERVISED AT ALL TIMES BUT ALSO ADVISE THAT SAFER SURFACING BE USED FOR ALL OUR EQUIPMENT

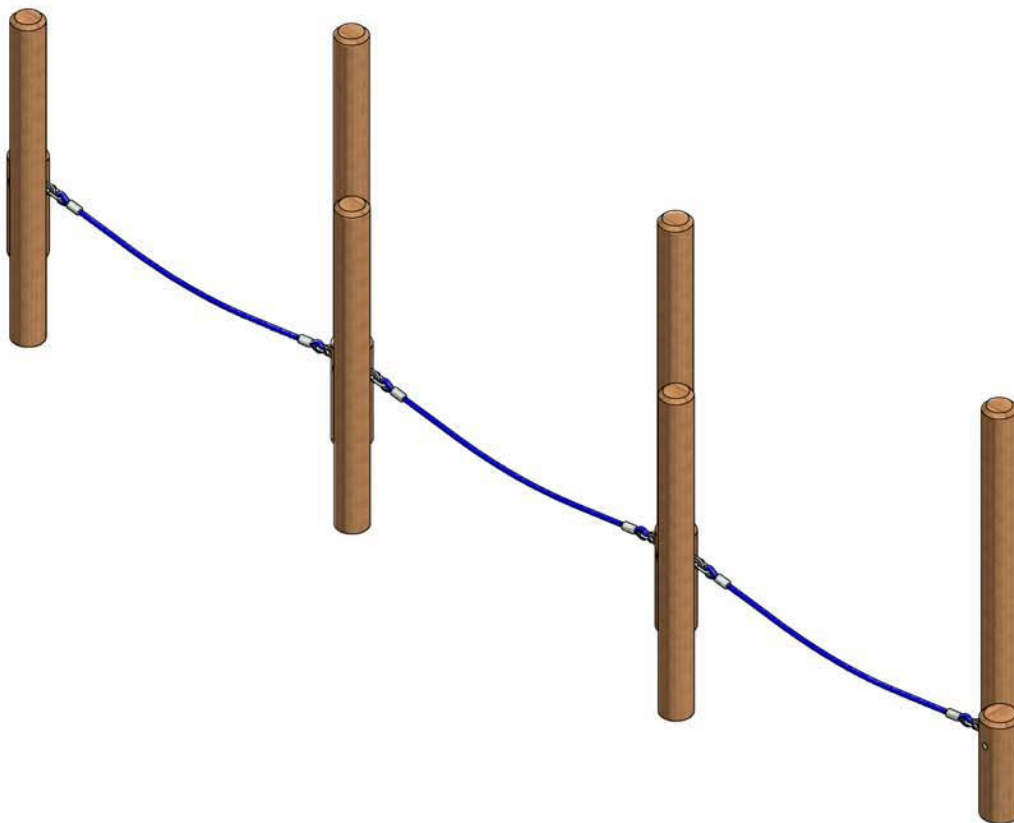

DIMENSIONS: L:4.7 x W:0.82 x H:1.3

TECHNICAL DATA

Minimum Space Required	7.7m x 3.14m
Free Height Of Fall	<0.6m
Topsoil or Turf Surfacing	OK
Safer Surfacing Area	7.7m x 3.14m
Intended Age Range	3+
Supervised Play	Recommended
Equipment Type	Outdoor Low Level
Curriculum	Agility & Co-ordination
Largest Component	1800mm x 120mm dia
Heaviest Component	12.2 kg
Overall Equipment Weight	110 kg
Special Equipment Required	None
Concrete Qty Required	0.85m3



SCALE PLAN 1:200

AREA OF SAFER SURFACING

Wetpour	25m2
Durascape	31.6m2
GrassSaver 22	24 Tiles
Loose Fill	25m2



API
Association of Play
Industries Registered
Constructor

**BS EN:1176
COMPLIANT**



Parts List				
ITEM	QTY	PART No	DESCRIPTION	IMAGE
1	6	FRLT1812_BK	1800mm x 120/125 dia	
2	2	FRLT0914_BW	900mm x 140/150 dia	
3	2	FRLT0914_BX	900mm x 140/150 dia	
4	3	FRMS00529	Tightrope Rope Set	
5	4	M10X120CB	M10 x 120 Coach Bolt	
6	4	M10WASH	M10 HD Large Plain Washer	
7	4	M10NYLOC	M10 Nyloc Hex Nut MS ZP	
8	2	TRC44S-A	Central Lug	
9	2	TRC44S-B	End Lug	
10	4	PLC480DCAP	Poly Cap 48	

Detail View

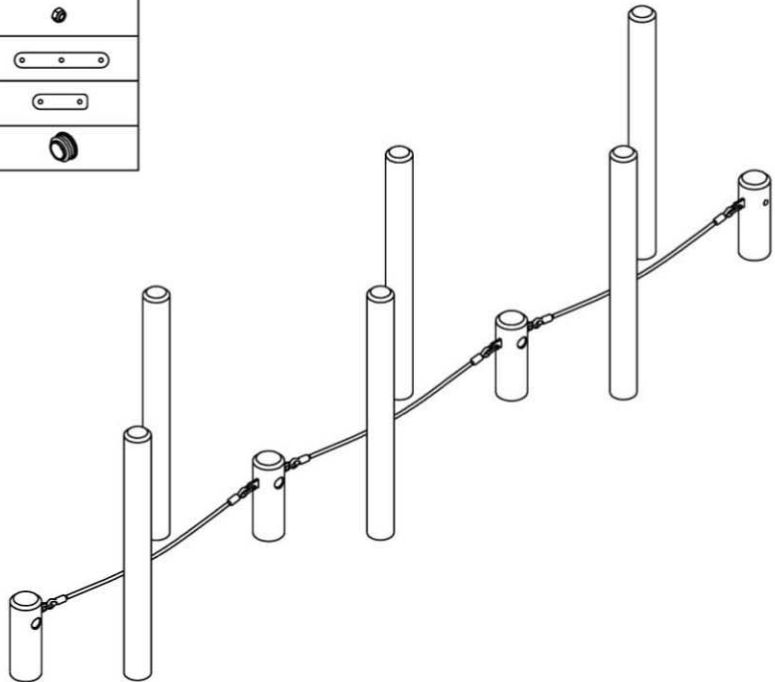
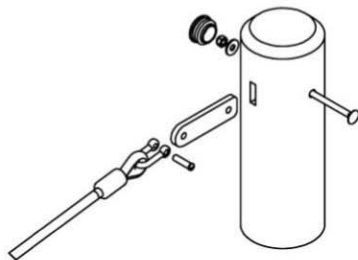


Installation Procedure

1. Excavate foundation holes in desired layout as shown on sheets 2 & 3. When installing into loose surfaces such as sand install the unit 100mm lower into the ground to allow for surfacing loss over time.
2. Position posts into the foundation holes check the posts are plumb and ensure counterbore holes are orientated with mortice correctly for Rope attachment.
3. Attach the Ropes to the Posts as shown.
4. Add concrete around posts, the top of the concrete should be 100mm below the finished surface level and should slope away from posts as shown. See drawing sheets 2 & 3.
5. Leave the concrete to set for 48 Hours. If the equipment is likely to be used during this time remove the ropes from the posts and re attach the following day.
6. Sand any rough edges or Surfaces and treat with preservative if necessary.
7. Check and tighten all fixings and install protective caps once checked.
8. This unit must be maintained in accordance with our inspection and maintenance schedule and BS1176 part 7.'



Drawing Number: TRC44-IN-AY				
<p>TOLERANCES General ± 1.0 Hole Diameters ± 0.5 Fixing Centres ± 0.5 Angles ± 0.5</p>	Material: See Drg			
	Finish: Clean	New	09/02/09	A
3rd Angle Projection	Drawn By: AK	CN	Date	Issue
	Scale: NTS	Sheet: 1	of: 2	

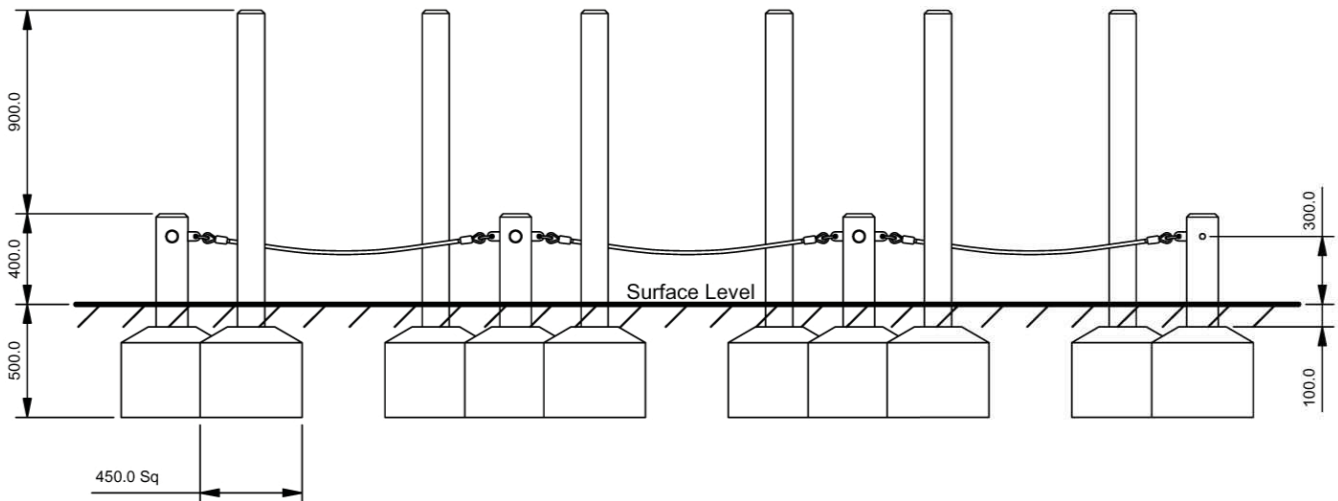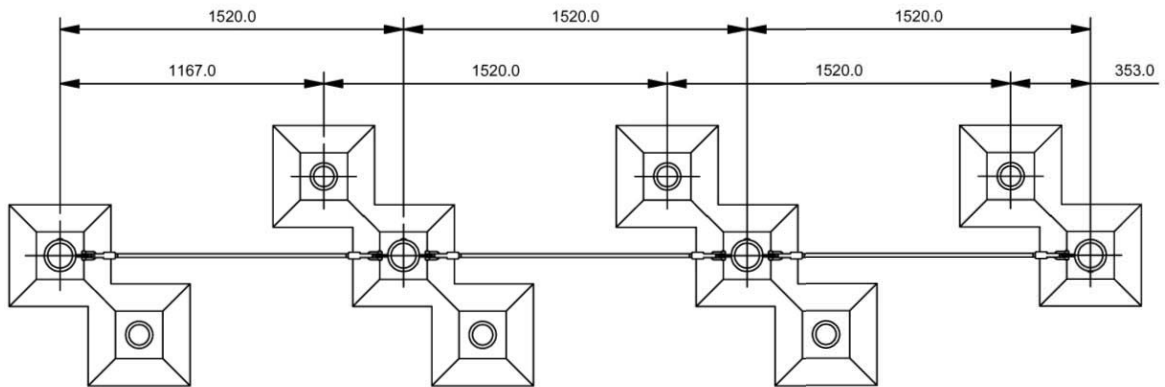

Drawing Number:

TRC44-IN-AY

TOLERANCES

General ± 1.0
 Hole Diameters ± 0.5
 Fixing Centres ± 0.5
 Angles ± 0.5


Material:

See Drg

Finish:

Clean

3rd Angle Projection



Drawn By:

AK

Scale:

NTS

Sheet:

2

of:

2

New	09/09/09	A
CN	Date	Issue